

■ SINGLE JOINT

■ ELECTRICALLY INSULATING

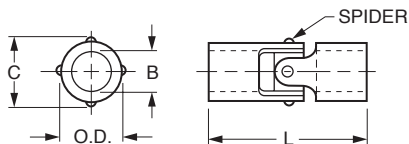


Fig. 1 PLAIN

2 SET SCREWS
EACH END
(SEE NOTE)

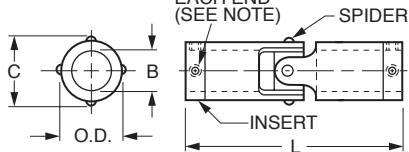


Fig. 2 WITH INSERT



MATERIAL: Body - Molded Acetal

Spider & Insert - Nickel Plated Brass

SPECIFICATIONS: Max. Angular Displacement - 45°

Max. Operating Temperature - 180°F

• FIG. 1 PLAIN						
Catalog Number	O.D.	B Bore +.000 -.002	Bore Depth (Typ)	L Overall Length	C	Max. Torque lb. in.
A 5T 8-D204	1/4	1/8	.23	3/4	.27	5
A 5T 8-D206		3/16				
A 5T 8-D306	3/8	3/16	.34	1-1/8	.41	16
A 5T 8-D308		1/4				
A 5T 8-D406	1/2	3/16	.42	1-25/64	.54	26
A 5T 8-D408		1/4				
A 5T 8-D410	5/8	5/16	.58	2-5/64	.68	60
A 5T 8-D508		1/4				
A 5T 8-D510		5/16				
A 5T 8-D512		3/8				
A 5T 8-D514		7/16				

• FIG. 2 WITH INSERT							
Catalog Number	O.D.	B Bore +.001 -.000	Bore Depth (Typ)	L Overall Length	C	Set Screw	Max. Torque lb. in.
A 5Z 8-D204	1/4	*1/8	.39	1-3/64	.27	#4-40	5
A 5Z 8-D304	3/8	*1/8	.52	1-31/64	.41		16
A 5Z 8-D306		3/16					
A 5Z 8-D406	1/2	3/16	.63	1-13/16	.54	#6-32	26
A 5Z 8-D408		1/4					
A 5Z 8-D508	5/8	1/4	.86	2-41/64	.68	#8-32	60
A 5Z 8-D510		5/16					
A 5Z 8-D512		3/8					

*NOTE: One set screw each end.

Molded Universal Joints

DOUBLE JOINT

ELECTRICALLY INSULATING

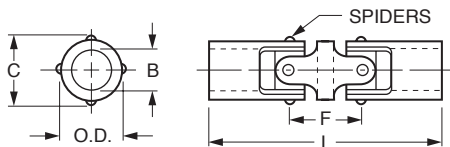


Fig. 1 PLAIN

2 SET SCREWS
EACH END
(SEE NOTE)

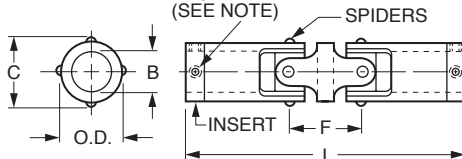


Fig. 2 WITH INSERT



SPECIFICATIONS: Max. Angular Displacement - 90°
Max. Operating Temperature - 180°F

MATERIAL: Body - Molded Acetal
Spider & Insert - Nickel Plated Brass

• FIG. 1 PLAIN								
Catalog Number	O.D.	B Bore +.000 -.002	Bore Depth (Typ)	L Overall Length	C	F	Max. Torque lb. in.	Max. Parallel Offset
A 5T 8-DD204	1/4	1/8	.23	1-1/16	.27	5/16	2.5	.22
A 5T 8-DD206		3/16						
A 5T 8-DD306	3/8	3/16	.34	1-41/64	.41	17/32	7.0	.36
A 5T 8-DD308		1/4						
A 5T 8-DD406	1/2	3/16	.42	2-1/64	.54	5/8	12.0	.43
A 5T 8-DD408		1/4						
A 5T 8-DD410	5/8	5/16	.58	2-61/64	.68	7/8	47.0	.61
A 5T 8-DD508		1/4						
A 5T 8-DD510		5/16						
A 5T 8-DD512		3/8						
A 5T 8-DD514		7/16						

• FIG. 2 WITH INSERT									
Catalog Number	O.D.	B Bore +.001 -.000	Bore Depth (Typ)	L Overall Length	C	F	Set Screw	Max. Torque lb. in.	Max. Parallel Offset
A 5Z 8-DD204	1/4	*1/8	.39	1-23/64	.27	5/16	#4-40	2.5	.22
A 5Z 8-DD304	3/8	*1/8	.52	2	.41	17/32	#4-40	7.0	.36
A 5Z 8-DD306		3/16							
A 5Z 8-DD406	1/2	3/16	.63	2-7/16	.54	5/8	#6-32	12.0	.43
A 5Z 8-DD408		1/4							
A 5Z 8-DD508	5/8	1/4	.86	3-33/64	.68	7/8	#8-32	47.0	.61
A 5Z 8-DD510		5/16							
A 5Z 8-DD512		3/8							

*NOTE: One set screw each end.